

EARTH GROUND SHIELD \*


CXT-IC4H10

CXT-IC4H10

PWR  
OUT 4-20 Toxic/O2  
OUT 4-20 BRIDGE  
COM

PWR  
OUT 4-20 Toxic/O2  
OUT 4-20 BRIDGE  
COM

DAISY-CHAIN POWER & GND WIRES RUNNING TO ADDITIONAL CXT ANALOG TRANSMITTERS.  
  
NOTE THAT ONE SIGNAL WIRE MUST BE PULLED FOR EACH CXT TRANSMITTER ADDED.

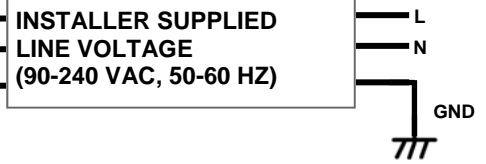

As shown, Strobe & Horn operate together.  
  
To enable Strobe only, connect the yellow wire and the black (ground) wire. To enable Horn only, connect the red wire and the black (ground) wire.

THREE RELAY CONTROL WIRING TERMINALS.  
  
CONNECT TO COM & NC. DO NOT USE SOLID CORE WIRE. RELAYS OPERATE IN "FAIL SAFE" CONFIGURATON.

\* Located inside the QCC

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.  
[www.critical-environment.com](http://www.critical-environment.com)  
  
QCC TO REMOTE CXT ANALOG TRANSMITTER WITH INFRARED BUTANE SENSOR AND RSH-24VDC USING THE RELAY WIRING CONNECTION DRAWING  
REV-A July 6, 2017