

INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL)

SELECT LOW or LINE VOTAGE INCOMING POWER TO DCC, NOT BOTH


RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE

INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)


INTERNAL ELECTRO-CHEMICAL SENSOR



INTERNAL SOLID STATE REFRIGERANT SENSOR OR INTERNAL ELECTROCHEMICAL SENSOR OR INTERNAL COMBUSTIBLE SENSOR.

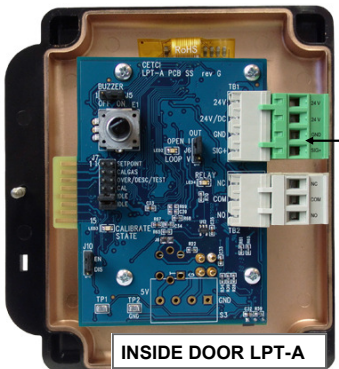

LPT-A 3-WIRE ANALOG TRANSMITTER WIRED TO DCC DUAL CHANNEL CONTROLLER



THIS DCC-D-XXX-RT / LPT-A COMBINATION MAKES A TWO CHANNEL GAS DETECTION MONITORING SYSTEM FOR THE SPECIFIED GAS IN MANY TYPES OF APPLICATIONS.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.
www.critical-environment.com
DCC-D-XXX-RT C/W LPT-A BOARD WIRING CONNECTION PHOTO DRAWING
REV-A May 31, 2017