

INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL)

SELECT LOW OR LINE VOLTAGE INCOMING POWER TO SCC, NOT BOTH


RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE

INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)

NO INTERNAL SENSOR



CXT WITH COMBUSTIBLE SENSOR

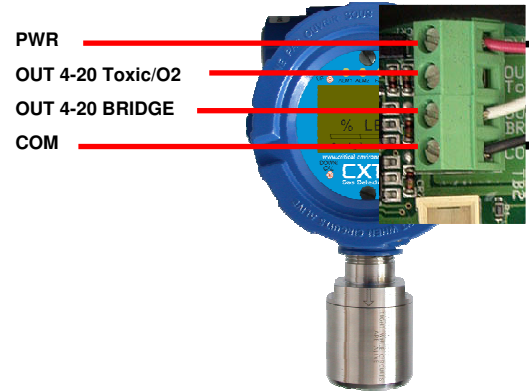

THIS SCC-B-RT WITH CXT COMBUSTIBLE COMBINATION MAKES A ONE CHANNEL DETECTION SYSTEM.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.  
www.critical-environment.com  
SCC-B-RT WITH CXT COMBUSTIBLE ANALOG WIRING CONNECTION PHOTO DRAWING  
July 27, 2016