



AIR CONDITIONING



REFRIGERATION



HEATING



MK4

CONDENSATE REMOVAL PUMP



The MK4 peristaltic is operated using two water sensors. The lower sensor comes into contact with water, the heat conductivity from that sensor provides a temperature difference between the second – energising the pump.



6.5L/h max. flow





12m max. head (flow rate 6.5L/h)

KEY FEATURES


- Water sensor operated
- Remote install possible
- Pumps contaminated water
- Can run dry

SUITABILITY

- Up to 8.5kW / 29,000Btu/h
 - High Wall Split Systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Drain pan water level sensor operation



MK4 @ 230 VAC 50Hz	
Max. flow	6.5L/h @ 12m head
Max. head	12m
Max. suction lift	3m
dB(A) @ 1m	47
Power supply	230 VAC, 0.2A, 50/60Hz
Rated	Continuously
Class	I appliance
Max. unit output	8.5kW / 29,000Btu/h
Max. water temp	40°C / 104°F
Inlet/outlet	6mm ID
IP Protection	IP21
Safety switch	n/a
Thermal protection	✓
Fully potted	n/a
Self priming	✓

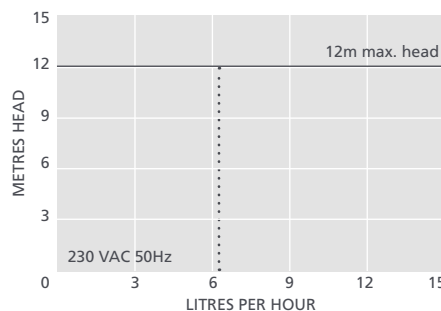

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Peri Spare Tube Kit	FP1282
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038

Xtra For more installation accessories take a look at our Aspen Xtra range

MK4 OPTIONS

MK4	FP2080
-----	--------

IN THE BOX

MK4 pump • 2m Plug & play power cable • Wall mounted bracket • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

Information correct at time of going to press.



aspenpumps.com

+44 (0)1323 848842

sales@aspenpumps.com

reliable | silent | simple