


FEATURES

- Complies with IEC 61672-1 class 2 standard
- Measures Leq, MaxL, MinL, SPL
- 64,000 Records Data Logger
- USB interface
- With Windows Software
- AC / DC Signal Output
- Back-lit display

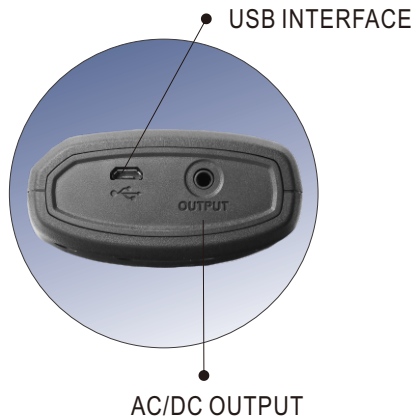

SPECIFICATIONS

- Measurement Range:** 30 ~ 130dB
Accuracy: ± 1.4 dB(ref 94 dB @ 1KHz)
Sampling Rate: 2 times/sec
Frequency Weighting: A/C
Time Weighting: FAST, SLOW
Frequency Range: 20 Hz ~ 8KHz
Microphone:
 1/2 inch Electret condenser microphone
Measuring time: 10 s, 1, 5, 10, 15, 30 m, 1, 8, 24 h
Power Source: 1.5V AA size battery x 4
Battery Life: 30 hours(Alkaline)
Operating Condition: 0°C to 40°C (<80%RH)
Storage Condition: -10°C to 60°C (<70%RH)
Dimensions: 272(L)X83(W)X42(H)mm
Weight: Approx. 390g
Accessories:
 Battery, Manual, Windscreen, 3.5 ϕ plug, windows software, USB Cable, Carrying Case.



LED Back Light

*The specifications and other information in this catalogue are subject to change without prior notice.

CENTER
CENTER TECHNOLOGY CORP.



4F, No.415, Jung-Jeng Road, Shu-Lin Dist.,
 New Taipei City 238, Taiwan
 TEL: 886-2-26763926 E-Mail: center@centertek.com
 FAX: 886-2-26763925 http://www.centertek.com

Distributed by:



Authorized Distributor
 APL ASIA CO., LTD.
 11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
 TEL. 0-2995-4461-3, FAX. 0-2995-4464
 www.apl-asia.com
 EMAIL: sales@apl-asia.com
 LINE@: @APL-ASIA