


CENTER 320 series




CENTER 320

- 4 Digits Display
- MAX/MIN Function
- Level Range Display
- Resolution 0.1dB
- AC/DC Signal Output
- IEC 651 TYPE II

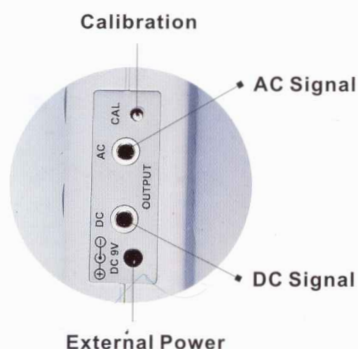

CENTER 321

- RS-232 Interface
- Bargraph Indication
- MAX MIN Function
- Auto Ranging (30~130dB)
- Resolution 0.1dB
- Level Range Display
- AC/DC Signal Output
- Auto Power Off
- IEC 651 TYPE II

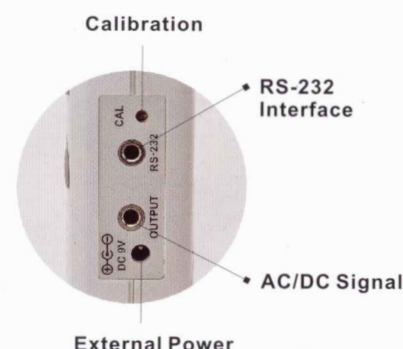

RS-232
Back light function

Specifications

Level Range: Lo= 30-80 dB
Med= 50-100 dB
Hi= 80-130 dB
Accuracy: $\pm 1.5\text{dB}$ (ref 94dB @1KHz)
Frequency Weighting: A, C
Time Weighting: Fast, Slow
Dynamic Range: 50 dB
Frequency Range: 31.5Hz to 8KHz

Microphone: Electret condenser microphone
Auxiliary Outputs: AC Output, DC Output
Battery Type: 9V, NEDA 1604, IEC 6F22, JIS 006P
Battery Life: 50 hours (with alkaline battery)
Operating Condition: 0°C to 40°C (<80%RH)
Storage Condition: -10°C to 60°C (<70%RH)
Dimensions: 275×64×30mm (10.8"×2.5"×1.2")
Weight: Approx.280g



Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130
Thailand. TEL. 0-2995-4461-3, FAX. 0-2995-4464
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA