


CENTER 320 series



CENTER 320


- 4 Digits Display
- MAX/MIN Function
- Level Range Display
- Resolution 0.1dB
- AC/DC Signal Output
- IEC 651 TYPE II

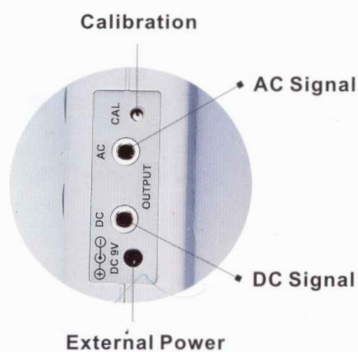

CENTER 321

- RS-232 Interface
- Bargraph Indication
- MAX MIN Function
- Auto Ranging (30~130dB)
- Resolution 0.1dB
- Level Range Display
- AC/DC Signal Output
- Auto Power Off
- IEC 651 TYPE II

RS-232
Back light function

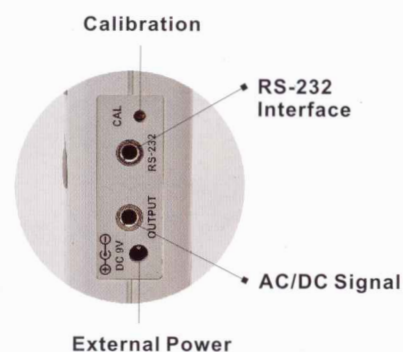

Specifications

- Level Range:** Lo= 30-80 dB
Med= 50-100 dB
Hi= 80-130 dB
- Accuracy:** ± 1.5dB(ref 94dB @1KHz)
- Frequency Weighting:** A, C
- Time Weighting:** Fast, Slow
- Dynamic Range:** 50 dB
- Frequency Range:** 31.5Hz to 8KHz

- Microphone:** Electret condenser microphone
- Auxiliary Outputs:** AC Output, DC Output
- Battery Type:** 9V, NEDA 1604, IEC 6F22, JIS 006P
- Battery Life:** 50 hours (with alkaline battery)
- Operating Condition:** 0°C to 40°C (<80%RH)
- Storage Condition:** -10°C to 60°C (<70%RH)
- Dimensions:** 275×64×30mm (10.8"×2.5"×1.2")
- Weight:** Approx.280g



Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lamlukka Rd., T.Kookut, A.Lamlukka, Pathumthani 12130
Thailand. TEL. 0-2995-4461-3, FAX. 0-2995-4464
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA