

INSTALLER SUPPLIED LOW VOLTAGE TERMINALS (24V NOMINAL)



SELECT LOW OR LINE VOLTAGE INCOMING POWER TO SCC, NOT BOTH

RELAY CONTROL WIRING TERMINALS. CONNECT TO COM & N/C. DO NOT USE SOLID CORE WIRE

INSTALLER SUPPLIED OPTIONAL LINE VOLTAGE (90-240 VAC, 50-60 HZ)

NO INTERNAL SENSOR

INTERNAL CATALYTIC H₂ or CH₄ or C₃H₈ SENSOR.
ESH-A WITH H₂ SENSOR SHOULD BE INSTALLED ON OR NEAR THE CEILING.

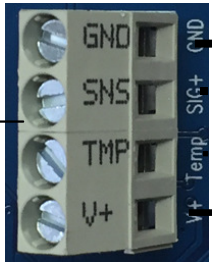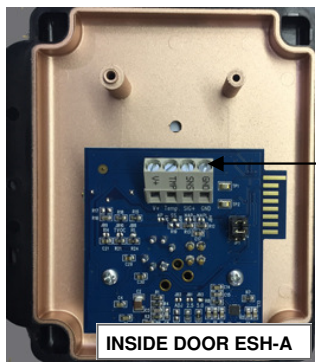

ESH-A 4-WIRE ANALOG TRANSMITTER WIRED TO SCC SELF-CONTAINED SYSTEM

THIS SCC-B-R / ESH-A COMBINATION MAKES A ONE CHANNEL DETECTION SYSTEM.

CRITICAL ENVIRONMENT TECHNOLOGIES CANADA INC.
www.critical-environment.com

SCC-B-R WITH ESH-A WIRING CONNECTION PHOTO DRAWING
May 18, 2016