



AIR CONDITIONING



REFRIGERATION



HEATING



EN

Macerator 4L & 10L

CONDENSATE REMOVAL PUMP

Designed to collect defrost water from multiple refrigeration cabinets. The internal filter blade prevents the pumps from clogging, allowing longer intervals between maintenance visits.



780L/h max. flow




8.5m max. rec. head (flow rate 80L/h)

KEY FEATURES

- Internal filter blade
- High flow & head
- Hi-level safety switch


SUITABILITY

- Single and multiple refrigeration units
- ✓ **Perfect for...** handling food waste that may pass through the pump

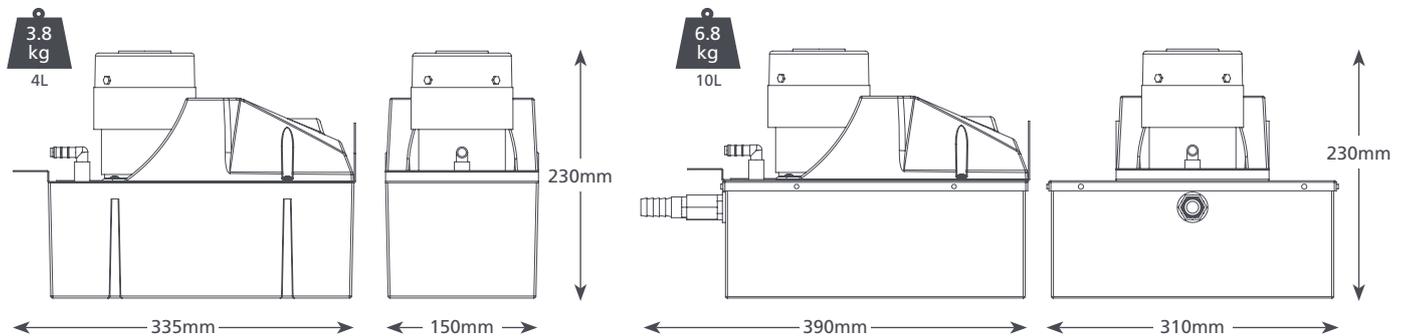

MACERATOR 4L & 10L @ 230 VAC 50Hz

Max. flow	780L/h @ 0m head
Max. rec. head	8.5m
Tank capacity	4L & 10L
dB(A) @ 1m	64
Power supply	230 VAC, 0.38A, 50/60Hz
Rated	Non continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	x2 40 & 55mm in, 10mm out
Additional inlet	3/4" in tank (10L only)
IP Protection	4L & 10L: IP21
Safety switch	4.0A Normally closed
Thermal protection	✓
Self priming	n/a

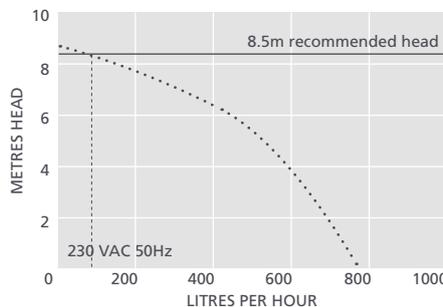

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5101

Xtra For more installation accessories take a look at our Aspen Xtra range

MACERATOR 4L & 10L OPTIONS

Macerator 4L	FP2305
Macerator 10L	FP2307

IN THE BOX

Macerator 4L or 10L pump (including hard wired 2m power cable) • Install manual

Download manual at aspenpumps.com

Information correct at time of going to press.