
## Elitech V700 Intelligent HVAC Vacuum Pump Automotive 7 CFM 2 Stage Touch Screen App







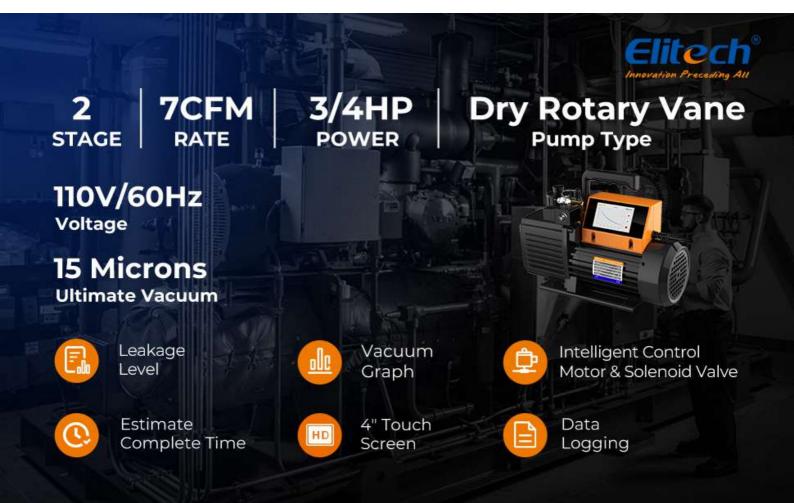

## IMPROVING TRADITIONAL WORK PROCESSES MAKES

	Elitech Smart Vacuum Pump	Ordinary Vacuum Pump	
START	+	<b>()</b> + ()	
ACUUMING	Achieving unattended operation after setting target vacuum value: • Estimate work completion time ; • Data recording(interval can be set) ; • Detect system leakage level.	<ul> <li>Check the status for many times</li> <li>Based on the change of vacuum value judging the remaining working time by experience.</li> </ul>	
STOP	Automatic stop and warning when reaching the target vacuum value	Manually shut down when vacuum reaches target value.	
<ul> <li>Export work log via APP (PDF or EXCEL);</li> <li>The vacuum graph record the quality of vacuuming work;</li> <li>Automatic stop and restart (prevent the damaged pump by the high temperature of the motor or oil).</li> </ul>		N/A	







## **Elitech Tools App**

- Motor and solenoid valve control
- Oil and motor temperature monitor
- Data logging and exporting
- Instant notifications, safe & efficient
- Vacuum graph display
- Read historical data



GET IT ON

Soogle play

Elitech

Elltoch

vation Preceding All





	SVP-7	SVP-9	SVP-12	V700	V900	V1200
Pumping Rate	7 <mark>CFM (</mark> 3 L/S)	9 CFM (4 L/S)	12 CFM (5 L/S)	7 CFM (3 L/S)	9 CFM (4 L/S)	12 CFM (5 L/S)
Stage	2 Stages					
Limit Vacuum	15 Microns					
Power Supply	110V/60HZ (220V customizable)					
Motor Power	3/4 HP (550 W)	1 HP (750 W)	1 HP (750 W)	3/4 HP (550 W)	1 HP (750 W)	1 HP (750 W)
Version	V1.0	V1.0	V1.0	V2.0	V2.0	V2.0
Ритр Туре	Dry Rotary Vane					
Transmission Distance	30ft /10m					
Weight	34.2 lbs / 14.5 kg	35.3 lbs / 15.3 kg	36.8 lbs / 16 kg	34.2 lbs / 14.5 kg	35.3 lbs / 15.3 kg	36.8 lbs / 16 kg

