




E7890 SOUNDER BEACON

FEATURES

- Weatherproof IP65 enclosure
- Adjustable tone and volume
- Beacon and sounder can be controlled separately
- Simple installation
- 32 tones



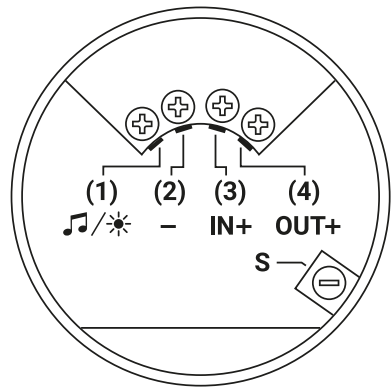

LINE

Common Positive Supply IN
 Sounder Negative Supply
 Beacon Negative Supply

TERMINAL MARKING

(3) IN+
 (2) - or COM -
 (1) 🎵 / ☀️

SPECIFICATIONS

Supply voltage	17...60 VDC
Operating temperature	-25...+70 °C
Protection class	IP65
Enclosure	Flame retardant polycarbonate
Volume	Up to 106 dB
Weight	250 g
Lens colour	Amber
Compliance	EN 54 3 Type B
Sounder current	4-45 mA
Beacon current	5 mA