


# CENTER 110 MULTIMETER

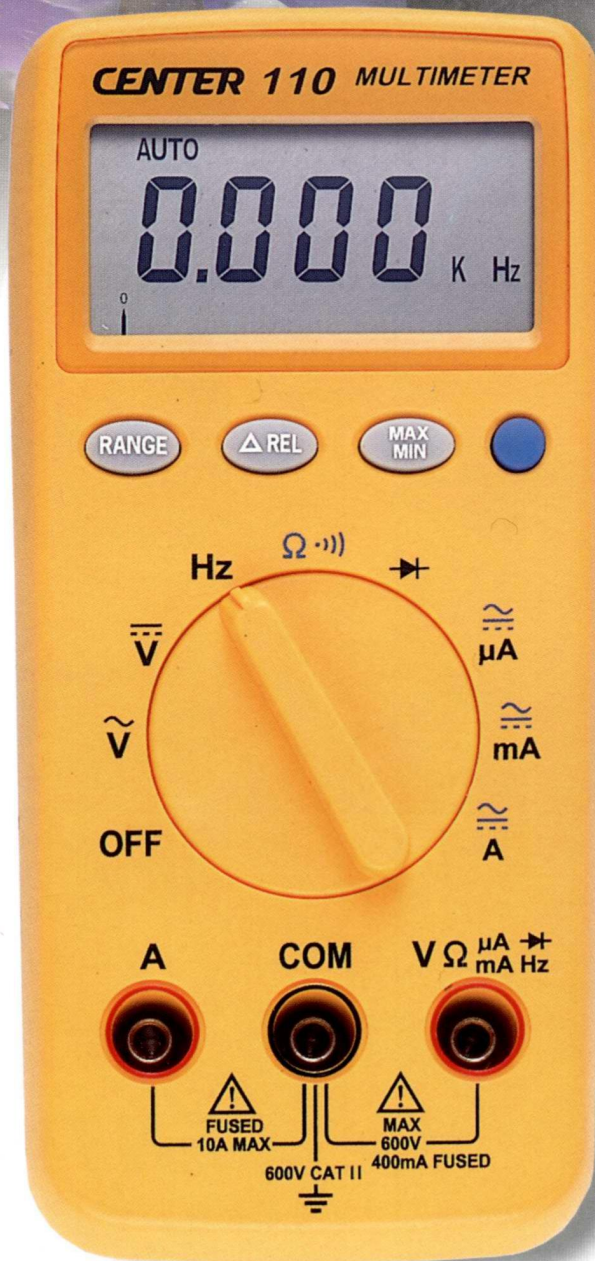

- Autoranging
- 3 3/4 Digits Display
- High Speed Bargraph
- Auto Power Off
- REL Function
- MAX MIN Function

CE IEC 1010 600V CAT II

**CENTER**®

# CENTER 110 MULTIMETER

## GENERAL SPECIFICATIONS

- Sampling Rate:** 2 times/sec for digital reading ;  
20 times/sec for analog bar indication
- Low Battery Indication:** The is displayed.
- Auto Power Off:** 30 minutes
- Battery Life:** 500 hours approx.(alkaline)
- Battery Type:** UM-4, Size AAA, 1.5V×2
- Safety Category:** IEC 1010 600V CAT II
- Operating Condition:** 0°C to 40°C(<80%RH)
- Storage Condition:** -10°C to 60°C(<70%RH)
- Dimensions:** 150×72×35mm (5.9"×2.8"×1.4")
- Weight:** Approx.220g
- Accessories:** Instruction Manual , Test Lead, Fuse (0.5A), Battery1.5V×2

3-3/4 Digits Display



## ELECTRICAL SPECIFICATIONS

Function	Range	Resolution	Accuracy
<b>ACV</b>	400mV	0.1mV	±( 1%rdg+4dgt )
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
<b>DCV</b>	400mV	0.1mV	±( 0.5%rdg+2dgt )
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
<b>ACA</b>	400uA	0.1uA	±( 1.3%rdg+5dgt )
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
<b>DCA</b>	400uA	0.1uA	±( 1%rdg+2dgt )
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
<b>Ohms</b>	400Ω	0.1Ω	±( 0.8%rdg+2dgt )
	4KΩ	1Ω	
	40KΩ	10Ω	
	400KΩ	100Ω	
	4MΩ	1KΩ	
	40MΩ	10KΩ	
<b>Hz</b>	4KHz	1Hz	±( 0.1%rdg+1dgt )
	40KHz	10Hz	
	400KHz	100Hz	
	4MHz	1KHz	
	40MHz	10KHz	
		Test Current: 1mA	
		Active Sound Level: ≤40Ω	



Hang Convenience

Built-in Tilt Stand



## CENTER®

### CENTER TECHNOLOGY CORP.

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin , Taipei, Taiwan  
 TEL: 886-2-26763926 E-Mail: center@centertek.com  
 FAX: 886-2-26763925 http://www.centertek.com



Authorized Distributor  
 APL ASIA CO., LTD.  
 11/129-132 Moo.5 Lam Lukka Rd., T.Kookut, A.Lam Lukka, Pathumthani 12130 Thailand.  
 TEL: 0-2995-4461-3, FAX: 0-2995-4464  
 www.apl-asia.com  
 EMAIL: sales@apl-asia.com  
 LINE@: @APL-ASIA