
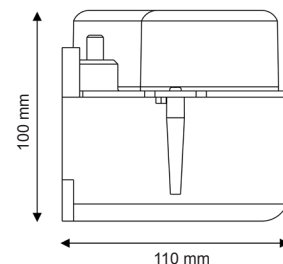


SUNNY FLOWWATCH® CLIM

SICCOM

Mini tank pump (solenoid) for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05RCC060

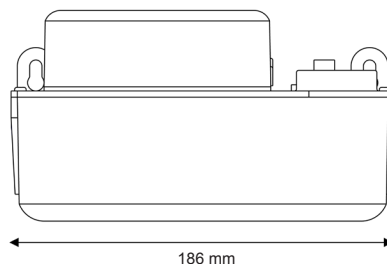

Hose diameter
Discharge : 6/9 mm - not supplied



SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.5 m / 1.3 m
Dimensions	186 x 110 x 100 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
** The pump is able to run 100% of the time if necessary.

BENEFITS



Very silent

Very silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWWATCH® CLIM offers the best tank capacity/pump size of the market.



IPX4 protection

Protected against water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets


Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

FLOWRATE

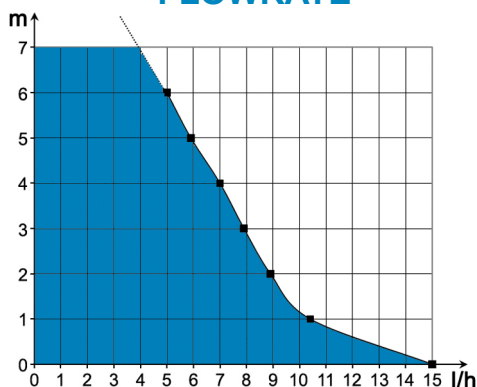

CONTENTS

Pump - Inlet tube - Screws and rawplugs



Authorized Distributor
APL ASIA CO., LTD.
11/129-132 Moo.5 Lam Lukka Rd., T.Kookut, A.Lam Lukka, Pathumthani 12130
Thailand. TEL. 0-2995-4461-3, FAX. 0-2995-4464
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA