


CENTER 221/222 AC Clamp Meter / AC/DC Clamp Meter (Mini Size)



CENTER 220s is our low cost mini clamp series. CENTER 221 is added with voltage and continuity functions. CENTER 222 is an AC/DC clamp meter.

FEATURES:

- Pocket Size
- 4 Digits Display
- Peak Hold Function (222)
- Data Hold Function
- 0.1A Resolution at Full Range (222)
- Touch Zero Function (222)
- Autoranging (221/222)
- Auto Power Off (222)

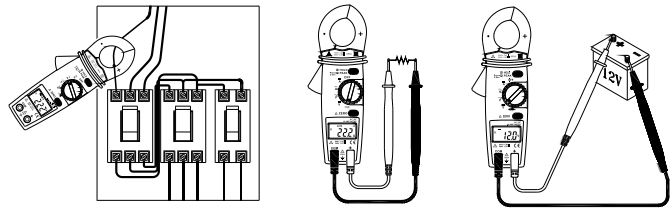

SPECIFICATIONS

Function	Range	Resolution	Accuracy	Display	3-1/2, 4 digital Liquid display
ACA	20A ~ 600A	0.01A ~ 1A	±2%rdg + 5dgts	Sampling Rate	2 times/sec
DCA	600A	0.1A	±2%rdg + 5dgts	Battery	1.5V, size AAA battery x 2
ACV	200V ~ 600V	0.1V ~ 1V	±1.5%rdg + 5dgts	Dimensions	187x50x29 mm
DCV	600V	0.1V	±1%rdg + 2dgts	Weight	approx.210g
Ohms	200Ω	0.1Ω	±1.9%rdg + 3dgts	Jaw Opening Diameter	25mm
·))	Active Sound Level: ≤ 100Ω			Peak Hold Capture Time	10ms

CENTER 223 AC/DC Clamp Meter (Mini Size, High Resolution)



CENTER 223 is a high resolution AC/DC clamp meter. With resolution of 1mA and span of 100A, this tester is great for appliance installation or for car applications.

FEATURES:

- Analog Signal Output Function
- Pocket Size
- 4 Digits Display
- Peak Hold Function
- Data Hold Function
- 1mA Resolution
- Touch Zero Function
- Autoranging
- Auto Power Off



SPECIFICATIONS

Function	Range	Resolution	Accuracy	Display: 4 digital Liquid display
ACA	10A ~ 100A	1mA ~ 10mA	±2%rdg + 10dgts	Sampling Rate: 2 times/sec
DCA	10A ~ 100A	1mA ~ 10mA	±2.5%rdg + 10dgts	Battery: 1.5V, size AAA battery x 2
ACV	600V	0.1V	±1.5%rdg + 5dgts	Dimensions: 202x50x29 mm
DCV	600V	0.1V	±1%rdg + 2dgts	Weight: approx.180g
Ohms	10KΩ	1Ω	±1%rdg + 3dgts	Jaw Opening Diameter: 12.5 mm
·))	Active Sound Level: ≤ 100Ω			
Analog Output: 10mV/Amp ; Frequency Response: 20KHz				



Authorized Distributor
APL ASIA CO., LTD.

11/129-132 Moo.5 Lamlukka Rd.,T.Kookut, A.Lamlukka, Pathumthani 12130 Thailand.
TEL: 0-2995-4461-3, FAX: 0-2995-4464
www.apl-asia.com
EMAIL : sales@apl-asia.com
LINE@ : @APL-ASIA